



Southwire™

RIGID ELBOWS

45° - GALVANIZED STEEL

FEATURES

- Low conductivity, high corrosion resistance
- Smooth defect free interior and exterior

APPLICATIONS

- For a secure connection to Rigid conduit; bend enables directional changes in conduit

STANDARD MATERIAL

- Galvanized steel

STANDARD FINISH

- Hot dip galvanized

CERTIFICATIONS


- Fed. Spec: WW-C-563
- 1/2" to 4" meet UL 6 and ANSI C80.1



11



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	(A) MIN. UL RADIUS	(B)STRAIGHT LEG EACH END
11	1/2"	---	50	26	4"	2.875"
12	3/4"	---	50	38	4.50"	2.875"
13	1"	---	35	45	5.75"	3"
14	1-1/4"	---	30	60	7.25"	3.25"
15	1-1/2"	---	15	45	8.25"	3.625"
16	2"	---	15	68	9.50"	4.1875"
17	2-1/2"	1	50	400	10.50"	5.25"
18	3"	1	40	455	13"	5.8125"
19	3-1/2"	1	35	560	15"	6.75"
20	4"	1	35	770	16"	6.9375"
20A	5"	1	42	1840	24"	8.125"
20B	6"	1	36	2556	30"	13.25"

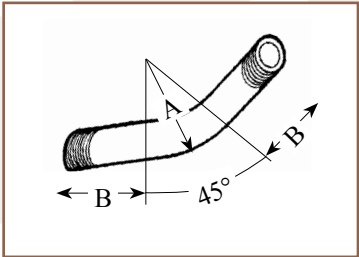

Rev. 0, 03/23

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

1-855-798-6657 | SOUTHWIRE.COM

©2023 Southwire Company, LLC. All rights reserved.
*Registered Trademark & ™Trademark of Southwire Company, LLC.