



Southwire™

RIGID ELBOWS

90° - GALVANIZED STEEL

FEATURES

- Low conductivity, high corrosion resistance
- Smooth defect free interior and exterior

APPLICATIONS

- For a secure connection to Rigid conduit; bend enables directional changes in conduit

STANDARD MATERIAL

- Galvanized steel

STANDARD FINISH

- Hot dip galvanized

CERTIFICATIONS


- cULus Listed
- Fed. Spec: WW-C-563
- 1/2"-4" meet UL 6 and ANSI C80.1



61



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	(A) MIN. UL RADIUS	(B) STRAIGHT LEG EACH END	(C) OFFSET
61	1/2"	---	50	40	4"	2.875"	6.343"
62	3/4"	---	50	54	4.50"	2.875"	6.781"
63	1"	---	20	40	5.75"	3"	8.901"
64	1-1/4"	---	20	60	7.25"	3.25"	10.25"
65	1-1/2"	---	10	42	8.25"	3.625"	11.937"
66	2"	---	10	68	9.50"	4.1875"	14.031"
67	2-1/2"	1	50	650	10.50"	5.25"	16"
68	3"	1	35	630	13"	5.8125"	18.947"
69	3-1/2"	1	35	910	15"	6.75"	22.218"
70	4"	1	25	825	16"	6.9375"	23.437"
70A	5"	1	30	1350	24"	11.125"	36.156"
70B	6"	1	24	1152	30"	12.4375"	41.46"

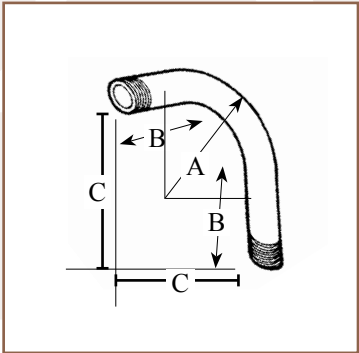

Rev. 0, 03/23

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

1-855-798-6657 | SOUTHWIRE.COM

©2023 Southwire Company, LLC. All rights reserved.
*Registered Trademark & ™Trademark of Southwire Company, LLC.